


EcoChromo GT

White lined chipboard; grey middle layer and white back layer



GRAMMAGE	THICKNESS	BULK	BENDING STIFFNESS 5° L +W	
g/m ²	µm	cm ³ /g	MD (mNm)	CD (mNm)
250	325	1.30	15	7
300	390	1.30	24	11
350	455	1.30	36	17
400	520	1.30	53	24
500	640	1,28	95	41

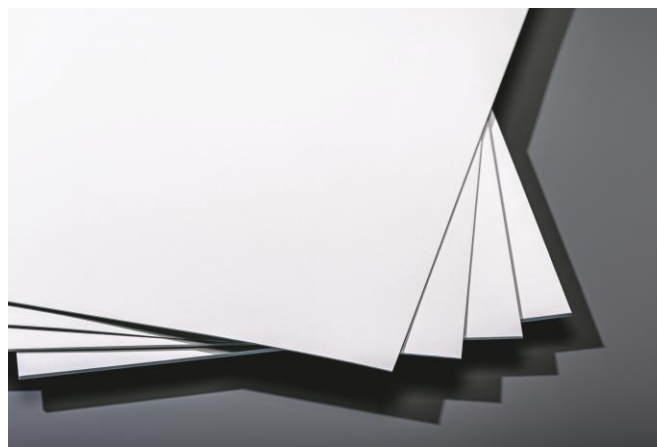

APPLICATIONS

Graphics • POS displays • folding cartons

PRINTING

Offset printing • flexographic printing

CONVERSION

UV, water-based and conventional varnish • foil and film lamination • hot foil stamping and cold foil transfer • embossing (high, relief, structure, micro) • die cutting, creasing, grooving, perforating, flock coating

ADDITIONAL INFORMATION

www.kapag.com

Tolerances / Testing Standards

Grammage (DIN EN ISO 536).....±2%
Thickness (DIN EN ISO 20534).....±5%
Bulk±5%
Stiffness (DIN 53121).....- 15%
Brightness (ISO 2470-02).....± 1.5 Elrepho (front side)

Printing Surface Properties

ISO Brightness (front side).....82%



The mark of
responsible forestry
FSC® C058892

GTxx.ECx1

November 2024 (replaces May 2022)